

## ***Wiring Your Accessory Switch Controller***

### **Connecting additional TMCC products in a “daisy chain” (continued)**

#### ***Power connections for additional units***

1. Attach a white wire to the additional Power U terminal on the ASC unit and connect it to the Power U terminal on another product.
2. Attach a black wire to the additional Power A terminal on the ASC unit and connect it to the Power A unit on another product.
3. Add additional products in the same manner, connecting the Power U terminals and the Power A terminals.

#### ***COMM connections for additional units***

1. Attach the red wire to the DAT terminal of the ASC unit and connect it to the DAT terminal of the next TMCC product.
2. Attach the green wire to the COM terminal of your ASC unit and connect it to the COM terminal of the next product.
3. Add additional products in the same manner, connecting the DAT terminals and the COM terminals.

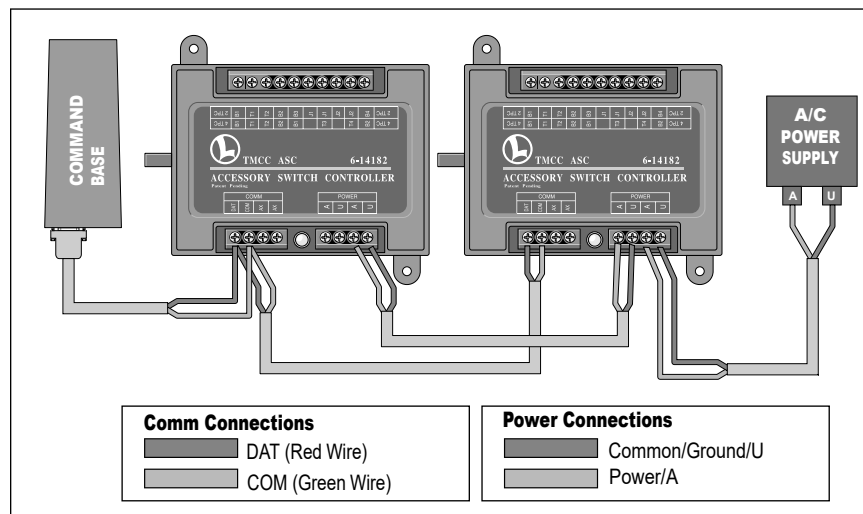


Figure 2. Connecting additional TMCC products in a “daisy chain”